

Product Specifications




Coaxial cable RG59 Cu-Cu - 75 ohm, PVC jacket, Eca , Emtex



Standard

- CE
- CPR : Eca

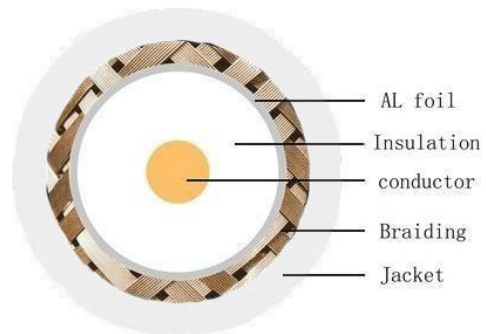

Application

- RF signal transmission
- MATV, CATV, CCTV
- Digital video applications
- Drop in broadcast
- Satellite systems

Specification

- Inner Conductor CU 0.70±0.01mm
- Dielectric Foam PE 3.50±0.20mm
- Shield Al Foil
- Braiding CU 16*3*0.12mm
- Jacket PVC 6.0±0.20mm

Electrical Specifications

- Impedance 75±2 Ω
- Capacitance 55 pF/m
- Velocity of Propagation 84%
- Operating Temp Range -10°C~65°C

Order and packaging codes

- CX59EMT/CU-CU - 100m roll - white color
- CX59EMT/CU-CU500 - 500m drum - white color

