

Product Specifications




Coaxial cable RG6 SAT - 75 ohm, PVC jacket, Eca , Emtex



Standard

- CE
- CPR : Eca

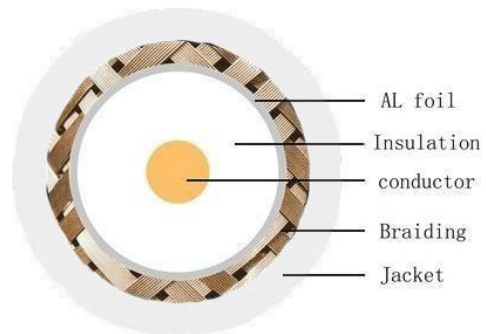

Application

- RF signal transmission
- MATV, CATV, CCTV
- Digital video applications
- Drop in broadcast
- Satellite systems

Specification

- Inner Conductor CU 1.02±0.01mm
- Dielectric Foam PE 4.70±0.20mm
- Shield Al Foil
- Braiding CU 16*3*0.12mm
- Jacket PVC 6.80±0.20mm

Electrical Specifications

- Impedance 75±2 Ω
- Capacitance 54 pF/m
- Velocity of Propagation 84%
- Operating Temp Range -10°C~65°C

Order and packaging codes

- CX6SATEMT - 100m roll - white color
- CX6SATEMT-500 - 500m drum - white color

